

---

Village of Fayetteville Parks Commission

# COULTER PARK 2020 REFRESH - PHASE 2

---

# **COULTER PARK 2020 REFRESH - PHASE 2**

Village of Fayetteville Parks Commission

- 1. Coulter Park Park 2017 Updates**
- 2. Current Status of Coulter Park**
- 3. Proposed Phase 2 Projects**



---

## Coulter Park Park 2017 Updates

- New play set added for age groups 3-5 years old.
- New play ground surfacing added in play area.
  - Equipment installed by Village DPW



---

## Current Status of Coulter Park Play Area

- Date of installation for existing slide is not know. Safety issues have been reported related to the exposed foundation and slippery stairs.
- Existing swings are similar vintage as the slide existing slide.
- Both swing and slides are recommended to be replaced with more current equipment.



---

## Current Status of Coulter Park Wooden Structures

- Remaining wooden structures are understood to be installed by Brookside Parks Neighborhood group 15 to 20 years ago.
- 1 of 2 backstops deteriorated to failure and was removed. Remaining backstop should be removed.
- Wooden balance beam and climbing structure was removed in 2019 as both had failed.
  - Existing wooden benches are in worn condition and should be considered for removal.
  - Existing monkey bars are in good condition and should remain
    - Existing bike rack is in good condition and should remain.
- Existing ornamental wooden fence is in poor condition and should be removed.





Replace slide and swing with new modern equipment - location and orientation may change

Add additional ANSI spec play ground mulch and clean up playground area boarder as needed.

Return picnic tables to pavilion and replace with shaded adult seating for supervision

### Proposed Budget

- > New Playground equipment (installed by DPW): \$14,155
- > New Park Benches (Installed by DPW): \$4,114
- > Tree Removal: \$2,800
- > Repave Basketball Court: \$7,000
- > Accessibility Paving - \$5,000
- > Misc - \$2,000
- > **Total Budget for Proposed upgrades: \$35,069**



2 bays of Single Post Swings  
2 Bucket Seats, 2 Belt Seats, \*Adaptive Seat



### Freestanding Straight Chute 8' Slide

\*actual slide will be taller





Storm water runs down park entrance..  
a Curb is required at top of stairs to  
divert water from running down the  
stairs

General clean up required at landing  
of stairs. Mainly due to run off from  
road.


Remove trees – Trees are not healthy. Roots are damaging court.

Refinish court - repair root damage and new superfine topcoat and lines for basketball / pickle ball.  
(Pickle ball players will need to bring their own portable net.)

Trim brush back and plant grass





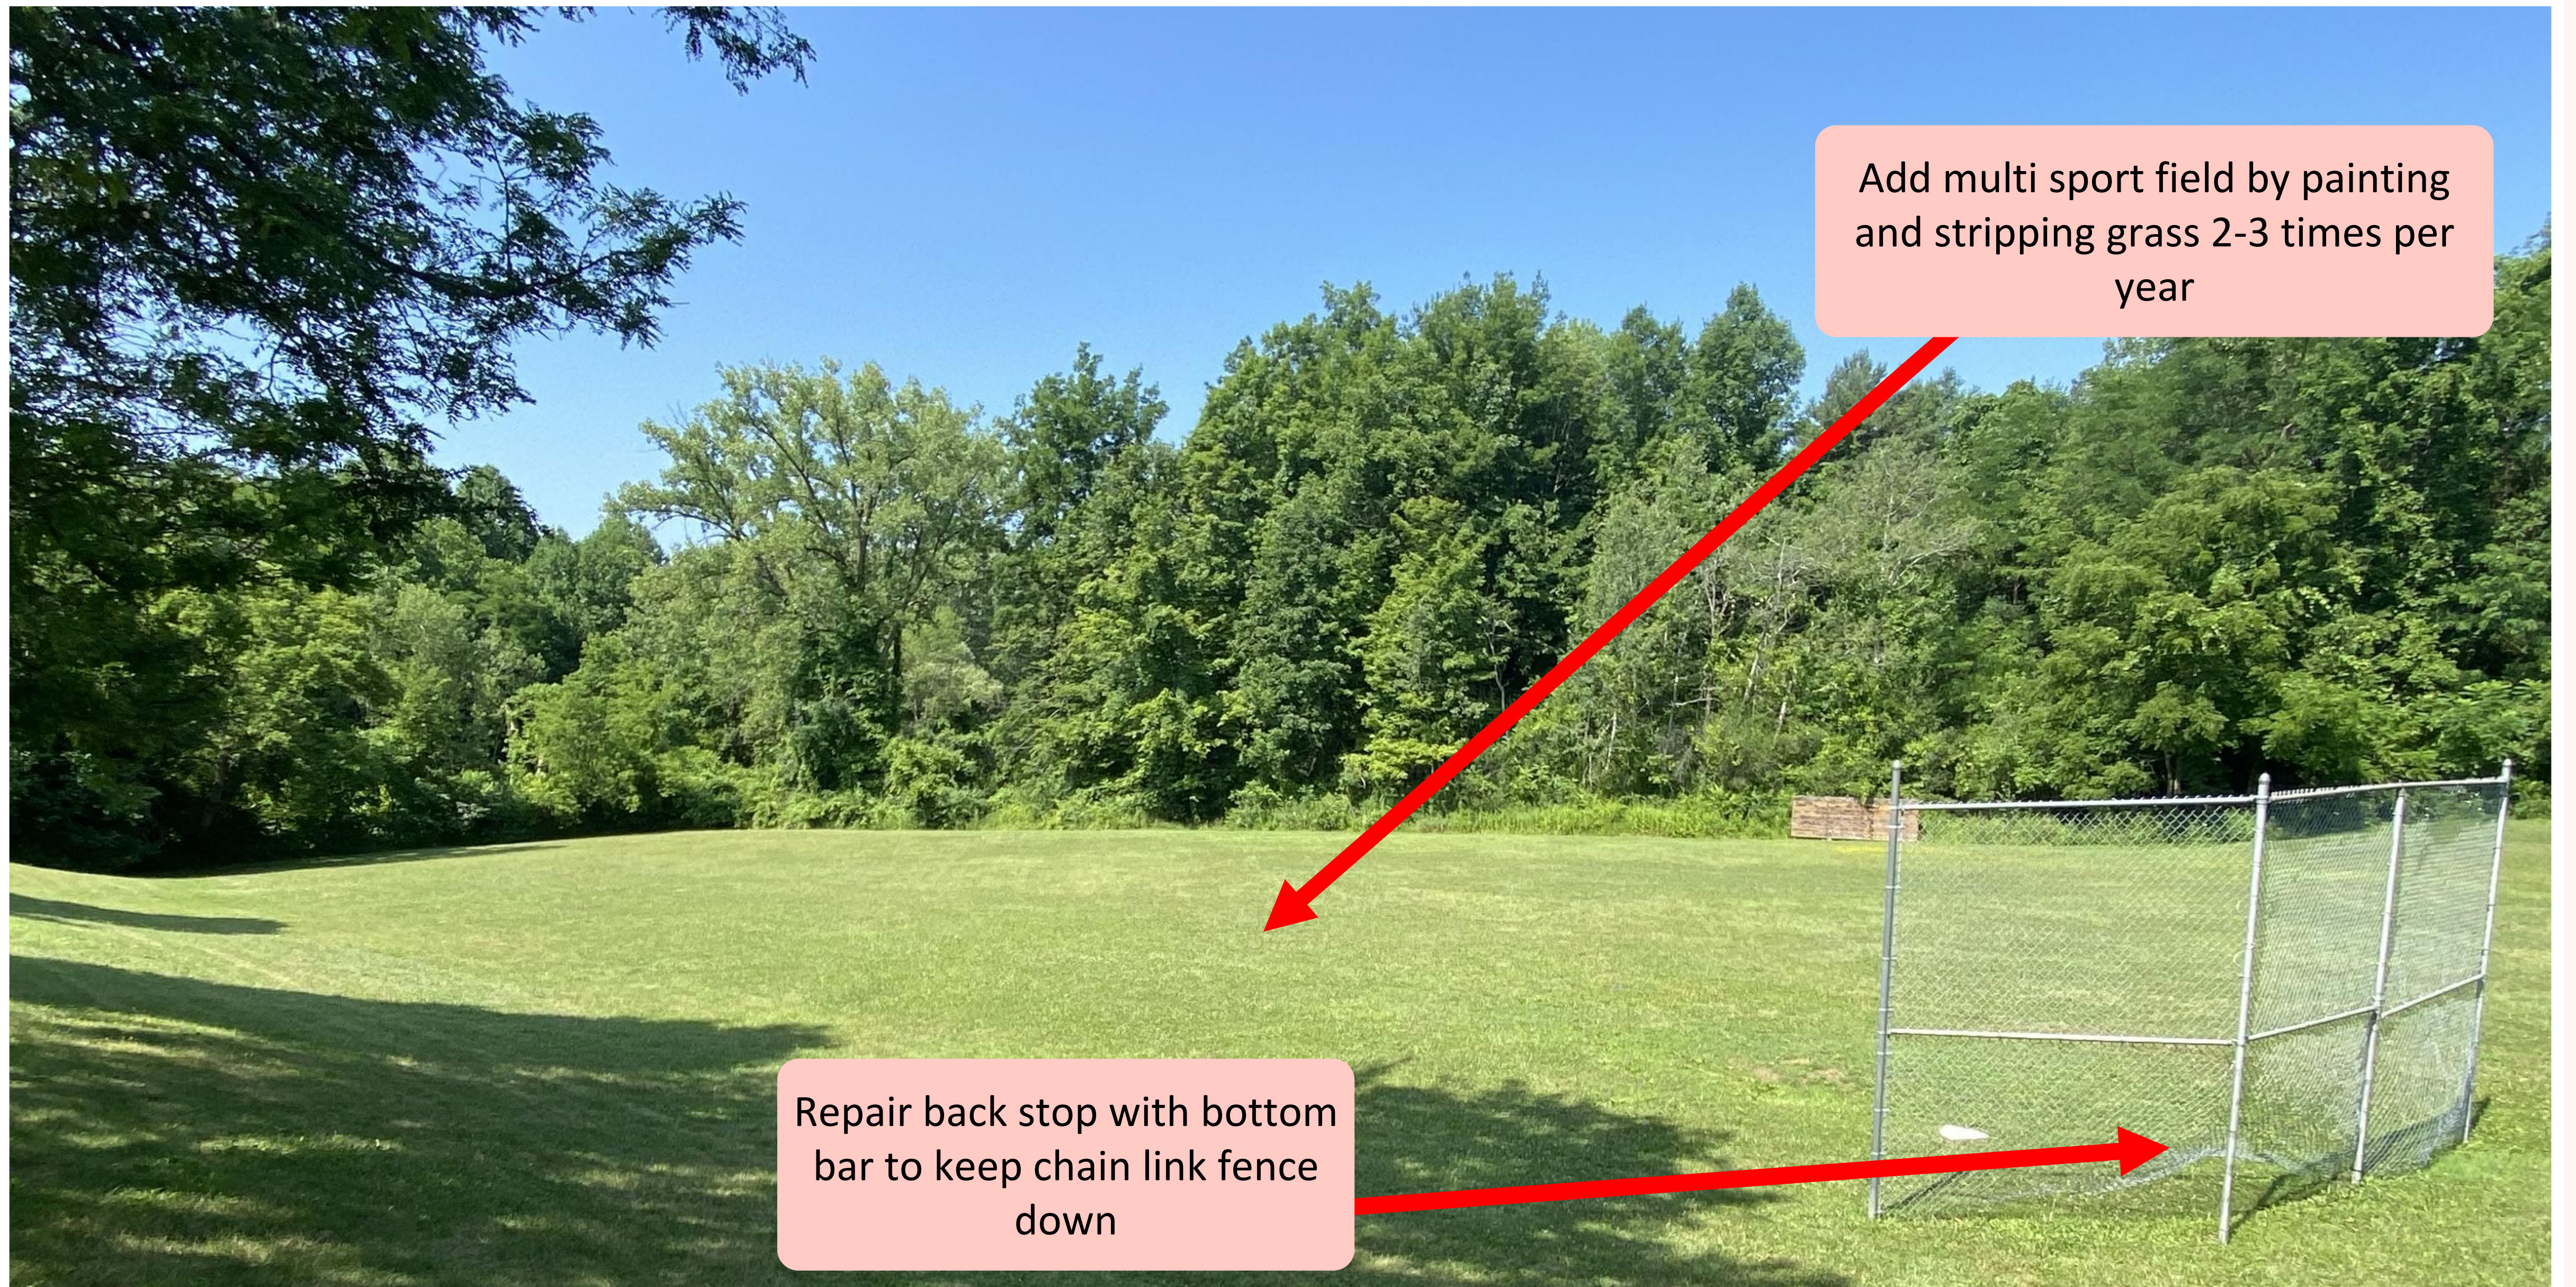

Add multi sport field by painting and stripping grass 2-3 times per year

Repair back stop with bottom bar to keep chain link fence down

Clean up bank and Add Bench facing 45 degrees down stream



# Coulter Park – Accessibility Recommendations

- Remove Wooden fence and add Handicapped Only Parking Signage
- Paint edge of road with high vis Yellow to provide visual cues.
- Install 4 ft wide pathway from road to play area with correct pitch.
- Optional: Continue pathway around South side of play area.
- Optional: Add Handicapped parking area.



Install seating for adults.